

Index: Z13

Corner: SOUTH
SECTION COR
S-33and S-34

LAND CORNER RECORD

State of Indiana
Hoosier National
Forest

Polk_M25

Township: 7N Range: 1E Section: 33


2nd P.M.

County: MONROE


EXISTING SURVEYS

Original Government Survey				Original Survey Evidence Found			
Year Surveyed:	1811	By:	Arthur Henrie	Date of Search:		By:	
Original Monument:				Monument Found:			
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance
Subsequent Corner Restoration				Evidence of Subsequent Corner Restoration Found			
Where Filed or Recorded:				Year Searched:			
Book: Page: Date:				By: Monument Found			
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance

OTHER EVIDENCE

Describe corner loc. relative to nearby features & dir. to corner location; note fences, roads, etc. Monument is on West facing slope about 30' East of creek bed and about 200' West of North corner of Sections 3 and 4, T6N R1E.	Sketch of Monument 
--	--

PERPETUATION RECORD

Monument: Describe new monument set or work done to perpetuate/preserve the existing monument/position. South Section Corner between Sections 33 and 34, T7N R1E; Forest Service monument found in good condition, 1.5' above grade.	
Corner Diagram 	Accessories: Describe new BTs & witness objects established to perpetuate existing evidence. 18" OAK, N26°E, 23.0' 24 OAK, N30°E, 28.5' 18" OAK, N10°E, 14.5'
	Corner Recordation: Certificate Prepared:
	Filed and Recorded in County records: Date:
	Book: Page:
Section: 33 & 34	Geodetic Coordinates: Lat./N. Long./E.
	Edited By: BRG Date Created: 11/2007

Accepted by the Monroe County Surveyor Review Board on August 6, 2019

MONUMENT RECORD

CORNER I.D.

M N - 25

STATE OF INDIANA - COUNTY OF MONROE


SECTION 34, TOWNSHIP 7 NORTH, RANGE 1 EAST

MONUMENT DESCRIPTION & REMARKS

FOUND SANDSTONE STONE AT THE NORTHWEST CORNER OF SEC. 3, T 6N, R1 E
THAT IS 154.65 FEET EAST OF THE SOUTHWEST CORNER OF SEC. 34, T 7 N,
R 1 E. STONE IS 0.30' X 1.20' X 0.10' HIGH.

RECOVERY TIE DRAWING

P.K. NAIL IN WEST SIDE
OF 17" BLACK OAK

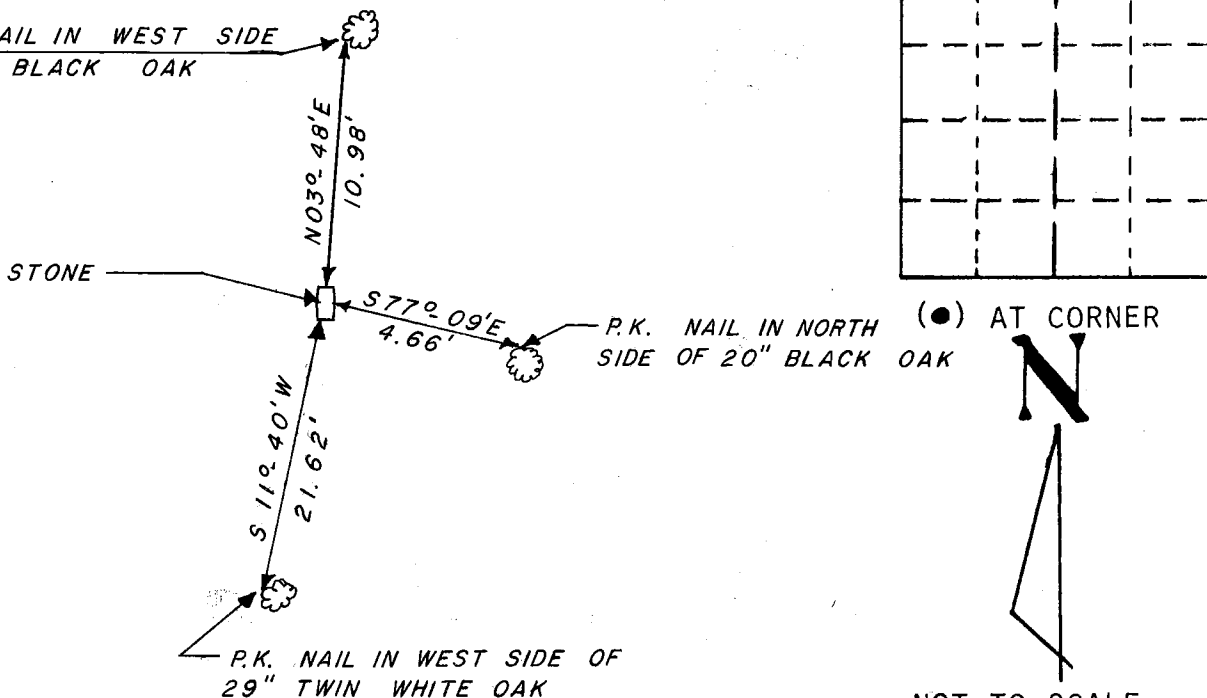

NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL THIS 13 TH. DAY OF JUNE, 1983 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TITLE _____

TOWNSHIP:
POLK

CORNER I.D.

M N - 25

MONUMENT RECORD

CORNER I.D.
M - 25

STATE OF INDIANA - COUNTY OF MONROE




SECTION 34, TOWNSHIP 7 NORTH, RANGE 1 EAST

MONUMENT DESCRIPTION & REMARKS

FOUND 3" DIAM. IRON PIPE 24" HIGH W/ BRASS CAP ON TOP SET BY
U.S. FORESTRY SERVICE AT THE S-W CORNER OF THE ABOVE SECTION.
OLD STONE IS LYING ON THE GROUND BESIDE THE U.S.F.S. MONUMENT.

RECOVERY TIE DRAWING

BRASS CAP

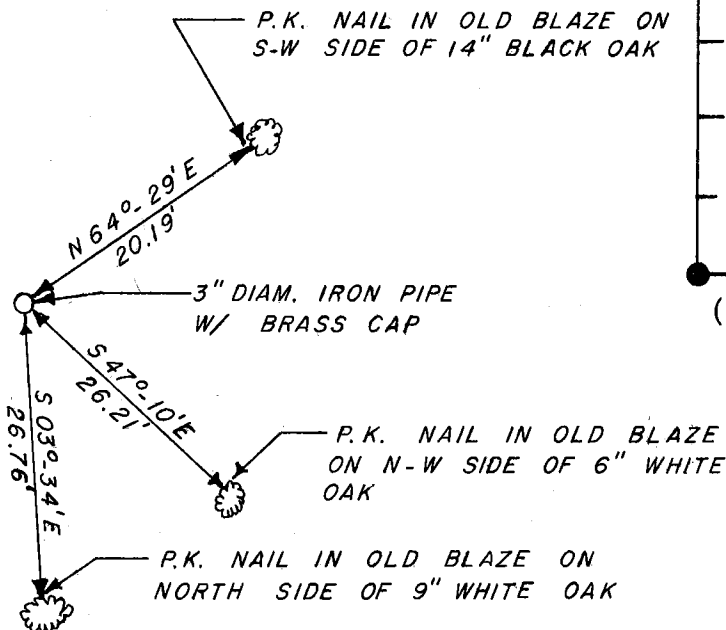

(●) AT CORNER



NOT TO SCALE

NOTE: BEARING TREES ARE MARKED W/
U.S.F.S. METAL TAGS.

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS
DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE
WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF
THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND
THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL
THIS 13 TH. DAY OF JUNE, 1983 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TITLE _____

TOWNSHIP:
POLK

POLK

CORNER I.D.

M - 25

CERTIFIED LAND CORNER RESTORATION

State of Indiana

County of Monroe

ss.

[M-25]

I Andrew J. Sobiech, do hereby certify that on the 28 day of June, 19 73, I found evidence of the Section corner of Section 33 and 34 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

original monument was a wood post set in 1814.	Found no evidence of original monument. No record of subsequent surveys.
original bearing trees:	
ickory W. Oak	
0' 15"	
37° W S 74° E	
lks 34 lks	


Description of corner evidence found:

Found a sandstone 10"x 12" x 2 ft. long marked on top with +. Found old wire fence running east near stone. Stone is on W slope of a ridge running N and S. F.S. notes describing location of NW corner Sec. 3, T6N, R1E were used to locate search area.

Description of monument and accessories I established to perpetuate the original location of this corner: replaced the stone with a 2" I.D. by 3 ft. long concrete filled, galvanized iron pipe, topped with a 3" DI. brass tablet stamped to identify the corner. I established the following witnesses:

W. Oak	W. Oak	Sign Post	Red Oak
4"	4"	4"x 4"	13"
05° E	S 46° E	S 83° E	N 60° E
7.0'	26.8'	7.8'	21.3'

Set the old stone on top of the ground beside the new monument.

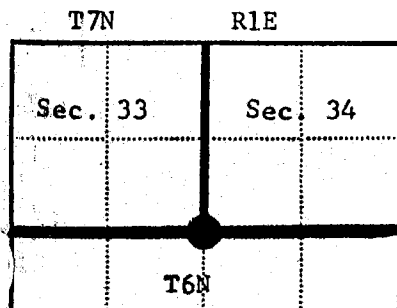

Field Assistant Henry Deaton - Ron Overshiner, U.S.F.S.
~~Resident witnesses~~
 Dated at Brownstown Indiana, this 28 day of June 19 73.
 Signature Andrew J. Sobiech Title R.L.S.
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)
 Surveyors Registration No. S-0143

Index No. <u>Z-13</u> (Alphabetical - Numerical)		LAND CORNER RECORD (RECTANGULAR SURVEYS)		R9-7150-4 (Rev. 6/13/67) GPO 806-924	
T. <u>7N</u>	R. <u>1E</u>	<u>2nd</u>	Mer. N.F. <u>Hoosier</u>	County <u>Monroe</u>	State <u>Ind</u>
Section <u>1</u>		Corner common to sections <u>33</u> , <u>34</u> , and _____			
EXISTING SURVEYS					
Original Government Survey			Original Evidence Found		
Year surveyed <u>1814</u>			Year of search <u>1972</u> By <u>H. Denton</u>		
Original monument <u>Wood post</u> (Wood post, stone, pile of stones, pipe, etc.)			Monument found <u>No</u>		
Bearing Trees			Original Bearing Trees Found		
Species _____			Species _____		
Diameter _____			Diameter _____		
Bearing _____			Bearing <u>None</u>		
Distance _____			Distance _____		
Subsequent Corner Restoration			Evidence of Subsequent Corner Restoration Found		
Year surveyed _____ By _____			Year of search <u>1972</u> By <u>H. Denton</u>		
Where filed or recorded _____			Found <u>sandstone</u>		
Monument _____ (Original, concrete post, iron rod, etc.)			_____		
_____			_____		
Bearing Trees, Reference Objects			Bearing Trees, Reference Objects		
Species _____			_____		
Diameter _____			_____		
Bearing _____			_____		
Distance _____			_____		

Index No. <u>Z-13</u> (Alphabetical - Numerical)		LAND CORNER RECORD (RECTANGULAR SURVEYS)		R9-7150-4 (Rev. 6/13/67) GPO 806-924	
T. <u>7N</u>	R. <u>1E</u>	<u>2nd</u>	Mer. N.F. <u>Hoosier</u>	County <u>Monroe</u>	State <u>Ind</u>
Section <u>1</u>		Corner common to sections <u>33</u> , <u>34</u> , and _____			
EXISTING SURVEYS					
Original Government Survey			Original Evidence Found		
Year surveyed <u>1814</u>			Year of search <u>1972</u> By <u>H. Denton</u>		
Original monument _____ (Wood post, stone, pile of stones, pipe, etc.)			Monument found <u>No</u>		
Bearing Trees			Original Bearing Trees Found		
Species _____			Species _____		
Diameter _____			Diameter _____		
Bearing _____			Bearing <u>None</u>		
Distance _____			Distance _____		
Subsequent Corner Restoration			Evidence of Subsequent Corner Restoration Found		
Year surveyed _____ By _____			Year of search <u>1972</u> By <u>H. Denton</u>		
Where filed or recorded _____			Found <u>sandstone</u>		
Monument _____ (Original, concrete post, iron rod, etc.)			_____		
_____			_____		
Bearing Trees, Reference Objects			Bearing Trees, Reference Objects		
Species _____			_____		
Diameter _____			_____		
Bearing _____			_____		
Distance _____			_____		



T7N R1E Sec 33+34
 33 S.O. +
 Looking East



Sketch

☐ Corner ☒ F.S. Land

At time of search:

1. Did you have the record description?

Yes ☒ No ☐

2. How was search area located?

Pacing, chaining, photos, maps, etc. F.S. notes

3. Man hours spent in search 2 hr

4. Do you think additional search might recover evidence? Yes ☐ No ☒

5. Signature J. Deaton

Relation of Evidence to Record Features Along Section Lines

Section line to sections 34
Object Crest 41Ks
Record distance 18 chs E
Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any. Thin fence running east near stone. Faint running to west of stone. Stone is 1" above ground on top of ridge - (Above notes came from old Forest Service Card)
Found a sandstone 10" x 2" x 2 ft. long marked on top w/ + stone, is about 2 1/2 chains W of crest of ridgetop remains of old fence from E ends at ridgetop.

Perpetuation Record

Monument and accessories established. Include brief description of area. _____

Certified corner restoration certificate prepared: Yes ☐ No ☐

Filed in county records at _____ Date _____ County Document No. _____

Identified on aerial photo No. _____ Which is filed at _____